

Tool to build the nox on wooden arrows

In 2 arrows
sizes
5/16 e
11/32 !!!



how to do - Unscrew the grub screw with the hex wrench and position the drill bit to the depth of nock you want to have.
insert the arrow and turning it clockwise until it penetrate all the way fig 1.2
Now it is important to turn the push arrow until the wood grain is parallel to the cut we're going to do, did this fix the arrow slightly, with the set screw and then proceed to the removal boobies two faces of excess wood, fig . 3-4.
Remove the arrow with the mouse tail removed the superfluous wood to the bottom of the hole previously made fig-5.
With the larger part of the rat tail, create in the bottom of the housing cut right for the size of your string fig 6.
Finish it all with thin sand paper before painting and finishing

fig.1

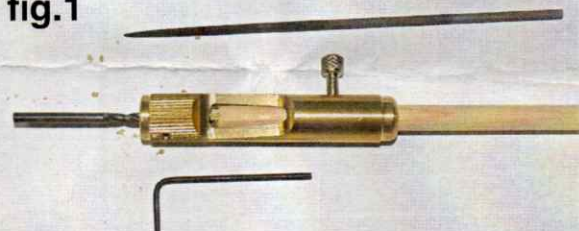


fig.2

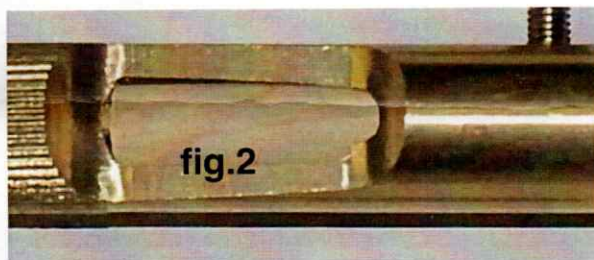


fig.3

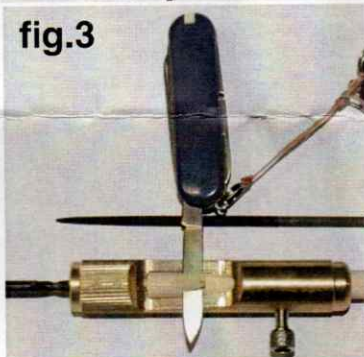


fig.4



**ARCO SPORT
SPIGARELLI**

fig.5



fig.6



Via Prenestina 252/E
00177 Roma
tel 0039/062148351
fax 0039/062147212
www.arcosportspigarelli.com
info@arcosportspigarelli.com